

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 211 829 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
05.06.2002 Bulletin 2002/23

(51) Int Cl.7: **H04H 1/00**(21) Application number: **01128770.3**(22) Date of filing: **03.12.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Inoue, Akio  
Kitakatsuragi-gun, Nara (JP)
- Otsubo, Yoshikazu  
Hirakata-shi, Osaka (JP)
- Hamabata, Takayuki  
Ikoma-gun, Nara (JP)

(30) Priority: **04.12.2000 JP 2000369197**

(71) Applicant: **Sanyo Electric Co., Ltd.  
Moriguchi-shi, Osaka (JP)**


(74) Representative: **Glawe, Delfs, Moll & Partner  
Patentanwälte  
Postfach 26 01 62  
80058 München (DE)**

(72) Inventors:  
• Hitomi, Akihiko  
Osaka-shi, Osaka (JP)

(54) **Receiver for receiving digital broadcasts, comprising a tuner for selecting a broadcast station from a plurality of broadcast stations**

(57) The invention provides a digital broadcast receiver which comprises a tuner 1 for selecting the desired broadcasting station from among a plurality of broadcasting stations, a demodulator circuit 3 for decoding a plurality of bit frames constituting the digital broadcast of the selected station, and a control circuit 4 for controlling the operation of the tuner and the demodulator circuit.

With one broadcasting station selected, the control circuit 4 stops decoding at least one of the bit frames, and searches for other broadcasting station or stations of satisfactory reception condition utilizing free time resulting from stopping decoding. Upon the reception condition becoming impaired, the station being received is changed over to the station of satisfactory reception condition by the control circuit 4.

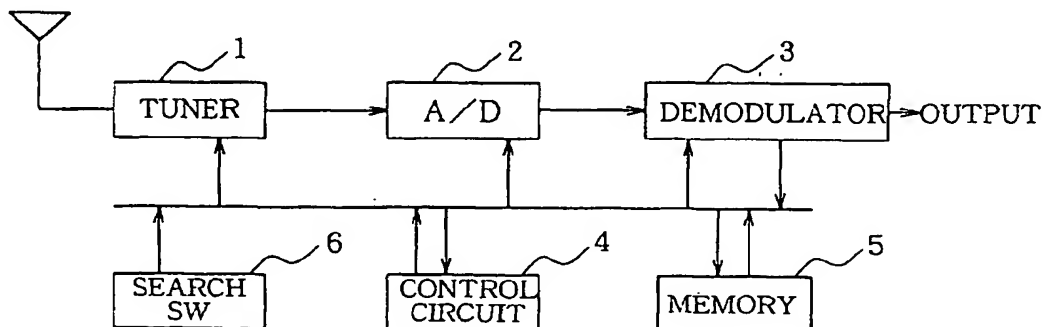**FIG.1**

EP 1 211 829 A2

## Description

### FIELD OF THE INVENTION

[0001] The present invention relates to digital broadcast receivers which can be mounted on mobile bodies such as motor vehicles and which are adapted to receive digital broadcast signals transmitted from a plurality of broadcasting stations.

### BACKGROUND OF THE INVENTION

[0002] As digital audio broadcasts for mobile bodies, DAB (Digital Audio Broadcast) systems have been introduced into actual use in recent years wherein digital audio signals are encoded with a high efficiency and modulated by OFDM (Orthogonal Frequency Division Multiplexing). Studies are also underway on IBOC (In-Band On-Channel) digital broadcasts which utilize the same frequency band as the existing analog audio broadcasts.

[0003] For the transmission of digital audio signals, studies are undertaken, for example, to allocate a digital carrier to a frequency band not in use and included within the range of regulation frame R concerning the frequencies and signal strengths assigned to the existing analog FM broadcasts as shown in FIG. 2(a). In this case, digital audio broadcast signals are transmitted in a transmission spectrum format shown in FIG. 2(b). Stated more specifically, the single bit stream providing a digital audio signal is divided into units of bits to form a plurality of (e.g., four) bit frames A, B, C and D as shown in FIG. 3. Different carrier frequencies are then allocated to the respective bit frames, which are arranged on the frequency axis as illustrated in FIG. 2(b). These bit frames A, B, C and D are transmitted cyclically with time differences.

[0004] The receiver receives the bit frames A, B, C and D and demodulates these bit frames to reproduce audio data. Processing the bit frames A, B, C and D individually for reproduction involves some degradation of audio quality, but the same contents as the original bit stream can then be retained.

[0005] In the above mode of digital audio broadcast for mobile bodies, the movement of the mobile body carrying the receiver is likely to entail an impaired reception condition. The user then needs to switch the current broadcasting station to some other station providing a better reception quality, hence a problem of cumbersome procedure.

### SUMMARY OF THE INVENTION

[0006] Accordingly, an object of the present invention is to provide a digital broadcast receiver which is so adapted that in the case where the reception condition has become impaired, the broadcasting station being received can be automatically changed over to other

station of better reception condition.

[0007] The present invention provides a receiver for receiving a digital broadcast having a transmission spectrum format which is prepared by dividing digital data comprising a single bit stream into a plurality of bit frames capable of holding the same contents as the original bit stream, allocating different carrier frequencies to the respective bit frames and arranging the bit frames on a frequency axis.

[0008] The digital broadcast receiver of the invention comprises a tuner for selecting the desired broadcasting station from among a plurality of broadcasting stations and receiving the digital broadcast of the selected station, a demodulator circuit for decoding a plurality of bit frames constituting the received digital broadcast and outputting the decoded bit frames and a control circuit for controlling the operation of the tuner and the demodulator circuit, the control circuit comprising:

decoding control means for stopping decoding at least one of the plurality of bit frames, with one broadcasting station selected, search means for searching for other broadcasting station or stations of satisfactory reception condition utilizing free time resulting from stopping decoding, and selected station changeover means for changing over the broadcasting station being selected for reception to the broadcasting station of satisfactory reception condition searched for.

[0009] The digital broadcast receiver of the present invention usually decodes all the bit frames received for reproducing digital signals. However, in preparation for a changeover to other broadcasting station of satisfactory reception condition in the event of an impaired reception condition, the receiver stops decoding at least one of the bit frames at a suitable time, and the resulting free time is utilized for searching for other broadcasting station of satisfactory reception condition.

[0010] Even if the decoding of at least one of the bit frames is discontinued, the broadcast data can be reproduced with the same contents as originally by decoding at least one of the remaining bit frames.

[0011] In the event of the reception condition becoming impaired, the broadcast station being selected for reception is changed over to the station of satisfactory reception condition detected by the search. The impairment of reception condition can be detected, for example, in terms of an error rate of reception data exceeding a predetermined threshold value. When an impaired reception condition is detected, changeover command means brings the decoding control means, the search means and the selected station changeover means into operation.

[0012] Stated more specifically, the control circuit further comprises register means for storing frequency data as to the other broadcasting stations of satisfactory

reception condition detected by the search, and the changeover command means reads the frequency data as to one broadcasting station from the register means and operates the changeover means.

[0013] Further stated more specifically, the changeover command means of the control circuit operates the decoding control means and the search means in accordance with a manipulation by the user or when a slightly impaired reception condition is detected by the sensor means to cause the register means to store the result of search.

[0014] According to another specific construction, the control circuit further comprises memory means for storing received frequency data as to one or a plurality of substitute stations inserted in the broadcast signal being received, and the search means searches for the substitute station of satisfactory reception condition from among the said one or plurality of substitute stations having the received frequency data stored in the memory means. In the event of impairment of reception condition, therefore, the broadcast of the station being received is changed over to another station which can be substituted. This diminishes the discomfort due to the change of station.

[0015] According to another specific construction, the control circuit comprises station sensor means for detecting other broadcasting station or stations broadcasting the same program as that being broadcast based on program identifying data inserted in the broadcast signal being received, and memory means for storing received frequency data as to the other broadcasting station or stations detected, and the search means searches for the broadcasting station of satisfactory reception condition from among the broadcasting station or stations having the received frequency data stored in the memory means. In the event of impairment of reception condition, therefore, the station being received is changed over to another station broadcasting the same program. Thus, the same program can be enjoyed continuously.

[0016] As described above, the digital broadcast receiver embodying the present invention is adapted to automatically change over the broadcasting station being received to other station of satisfactory reception condition in the event of impairment of reception condition. The user therefore need not perform the cumbersome procedure of searching for other broadcasting station of satisfactory reception condition.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

FIG. 1 is a block diagram showing the construction of a DAB receiver embodying the invention;

FIG. 2 is a diagram for illustrating the transmission spectrum format of a DAB system;

FIG. 3 is a diagram showing a single bit stream as divided into four bit frames;

FIG. 4 is a flow chart showing the procedure to be performed by a control circuit of the DAB receiver of the invention;

FIG. 5 is a flow chart showing a search flag procedure;

FIG. 6 is a flow chart showing a search procedure; and

FIG. 7 is a flow chart showing another search procedure.

#### DETAILED DESCRIPTION OF EMBODIMENT

[0018] With reference to the drawings, a detailed description will be given of the present invention as embodied into a digital audio broadcast receiver (DAB receiver) for the DAB system shown in FIG. 2. As shown in FIG. 1, the DAB receiver of the invention comprises a tuner 1 for receiving audio broadcast signals, an A/D conversion circuit 2 for converting the received audio broadcast signal to digital data and a demodulator circuit 3 for demodulating the digital data obtained from the conversion circuit 2 to output the data as a digital audio signal. The receiver further comprises a control circuit 4 for controlling the operation of the tuner 1, A/D conversion circuit 2 and demodulator circuit 3, a memory 5 for storing various items of data and a search switch 6 to be manipulated by the user for searching for other broadcast stations of satisfactory reception condition.

[0019] The digital data obtained from the A/D conversion circuit 2 comprises four bit frames having the same contents as shown in FIG. 3. The demodulator circuit 3 usually demodulates these four bit frames, whereas when an impaired reception condition is detected as will be described later, the decoding of a predetermined bit frame (specified bit frame) is discontinued, and the remaining three bit frames are decoded to reproduce digital audio signal.

[0020] The free time resulting from the interruption of decoding of the bit frame is utilized to search for other broadcasting stations of satisfactory reception condition, and the station being received is changed over to another station of satisfactory reception condition in the event of impairment of reception condition.

[0021] FIG. 4 shows the control procedure to be performed by the control circuit 4. When the user manipulates a power source button, the power source is turned on in step S1 first for initialization. Subsequently, step S2 starts to demodulate digital data received. Reception frequency data as to substitute station (AF station) written in the header portion of demodulated digital data [see JP-A No. 7-231269 (1995), No. 5-48395(1993)] is read and stored in a predetermined portion of the memory in step S3.

[0022] A search flag procedure shown in FIG. 5 is then executed in step S4. An inquiry is made in step S41 as to whether the search switch is turned on by the user or whether the reception condition has become impaired slightly. If the inquiry is answered in the affirmative, a

search flag is set to "1" in step S42.

[0023] FIG. 4, step S5 thereafter inquires whether the search flag is "1." If the answer is negative, step S2 follows again to repeat the search flag procedure. When the answer to the inquiry of step S5 is affirmative, step S6 follows to inquire whether it is time to decode the specified frame.

[0024] When the inquiry of step S6 is answered in the affirmative, step S7 follows to execute a search procedure shown in FIG. 6. An inquiry is made in step S71 as to whether all substitute stations have been completely checked for reception condition. If the answer is negative, the sequence proceeds to step S73, in which the reception frequency data (AF data) as to another substitute station is read, tuning to the frequency is made, and the reception condition is checked. Step S74 then inquires whether the reception condition is satisfactory. The acceptability of the reception condition can be determined by whether AGC (automatic gain control) data or error rate data as to the demodulated digital data is in excess of a predetermined threshold value.

[0025] When the answer to the inquiry of step S74 is affirmative, the reception frequency data (AF data) of the substitute station is stored in the register in step S75, whereupon the sequence returns to step S71. When the inquiry of step S71 is thereafter answered in the affirmative, the search flag is set to 0 in step S72, followed by step S2 of FIG. 4.

[0026] The search procedure described is performed within the time required for decoding one bit frame.

[0027] On the other hand, if the inquiry of FIG. 4, step S6 is answered in the negative, step S8 follows to inquire whether the reception condition is satisfactory. When the answer is negative, the sequence proceeds to step S9 to inquire whether the reception frequency data as to substitute station is preset in the register. If the answer to the inquiry of step S9 is affirmative, the station being received is changed over to the substitute station in step S10, where upon the sequence returns to step S2.

[0028] With the search switch held on in advance, or when the reception condition becomes slightly impaired with movement, other broadcasting stations which are satisfactory in reception condition are searched for. Upon the reception condition becoming impaired subsequently, the station being received is changed over to another station of good reception condition promptly. This relieves the user of the cumbersome procedure of searching for other station of satisfactory reception condition.

[0029] The search procedure shown in FIG. 6 registers as substitute stations the broadcasting stations of satisfactory reception condition which can be substituted for the station being received, and the station being received, when becoming impaired in reception condition, is changed over to the substitute station. This almost completely eliminates the discomfort involved in a change of contents of broadcast.

[0030] FIG. 7 shows a search procedure which can be performed when program identification data is written instead of substitute station in the header portion of the demodulated digital data. The received frequency is gradually varied in step S11, and step S12 inquires whether the frequency varying cycle has been completed. If the answer is negative, an inquiry is made in step S13 as to whether the reception condition is satisfactory.

[0031] If the answer to the inquiry of step S13 is affirmative, an inquiry is made in step S14 with reference to the program identification data as to whether the program received anew by varying the frequency is the same as the program preceding the variation. When the answer is affirmative, the frequency data as to the newly received program is stored in the register. When the inquiry of step S12 is thereafter answered in the affirmative, step S16 follows to set the flag to 0, whereupon the sequence returns to step S2 of FIG. 4.

[0032] A broadcasting station satisfactory in reception condition and broadcasting the same program as the station being received is registered as a substitute station by the search procedure shown in FIG. 7, and in the event of the reception condition becoming impaired, the station current being received is changed over to the substitute station, permitting the user to enjoy the same program continuously.

[0033] Although the search procedure is performed when the search switch is on or upon the reception condition becoming slightly impaired according to the procedure of FIG. 4, this is not limitative; the search procedure can be executed, for example, upon turning on the power source of the receiver, upon a changeover of selected station or upon a change of substitute station.

## Claims

1. A receiver for receiving a digital broadcast having a transmission spectrum format which is prepared by dividing digital data comprising a single bit stream into a plurality of bit frames capable of holding the same contents as the original bit stream, allocating different carrier frequencies to the respective bit frames and arranging the bit frames on a frequency axis, the digital broadcast receiver comprising a tuner for selecting the desired broadcasting station from among a plurality of broadcasting stations and receiving the digital broadcast of the selected station, a demodulator circuit for decoding a plurality of bit frames constituting the received digital broadcast and outputting the decoded bit frames and a control circuit for controlling the operation of the tuner and the demodulator circuit, the digital broadcast receiver being characterized in that the control circuit comprising:

decoding control means for stopping decoding at least one of the bit frames, with one broad-

casting station selected,  
 search means for searching for other broad-  
 casting station or stations of satisfactory recep-  
 tion condition utilizing free time resulting from  
 stopping decoding, and  
 selected station changeover means for chang-  
 ing over the broadcasting station being select-  
 ed for reception to the broadcasting station of  
 satisfactory reception condition searched for.

stations having the received frequency data stored  
 in the memory means.

2. A digital broadcast receiver according to claim 1  
 wherein the control circuit further comprises a sen-  
 sor means for detecting an impaired reception con-  
 dition, and changeover command means for bring-  
 ing the decoding control means, the search means  
 and the selected station changeover means into op-  
 eration.
3. A digital broadcast receiver according to claim 2  
 wherein the control circuit further comprises regis-  
 ter means for storing frequency data as to the other  
 broadcasting stations of satisfactory reception con-  
 dition searched for by the search means, and the  
 changeover command means reads the frequency  
 data as to one broadcasting station from the register  
 means and operates the selected station changeo-  
 ver means.
4. A digital broadcast receiver according to claim 3  
 wherein the changeover command means of the  
 control circuit operates the decoding control means  
 and the search means in accordance with a manip-  
 ulation by the user or when a slightly impaired re-  
 ception condition is detected by the sensor means  
 to cause the register means to store the result of  
 search.
5. A digital broadcast receiver according to claim 1  
 wherein the control circuit further comprises mem-  
 ory means for storing received frequency data as to  
 one or a plurality of substitute stations inserted in  
 the broadcast signal being received, and the search  
 means searches for the substitute station of satis-  
 factory reception condition from among said one or  
 plurality of substitute stations having the received  
 frequency data stored in the memory means.
6. A digital broadcast receiver according to claim 1  
 wherein the control circuit further comprises station  
 sensor means for detecting other broadcasting sta-  
 tion or stations broadcasting the same program as  
 that being broadcast based on program identifying  
 data inserted in the broadcast signal being re-  
 ceived, and memory means for storing received fre-  
 quency data as to the other broadcasting station or  
 stations detected, and the search means searches  
 for the broadcasting station of satisfactory reception  
 condition from among the broadcasting station or

FIG.1

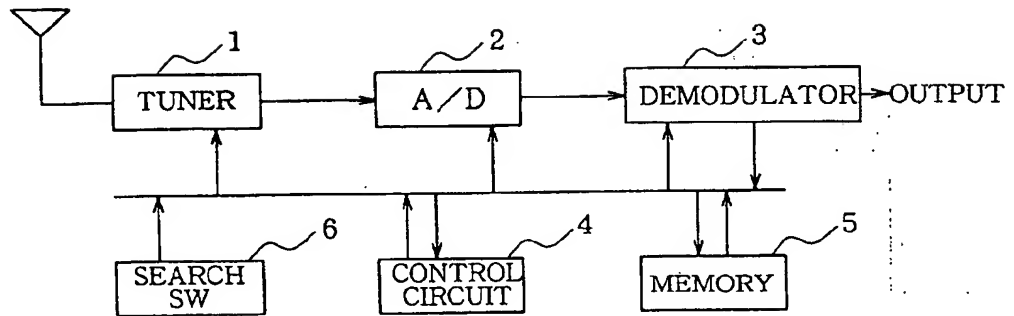


FIG.2

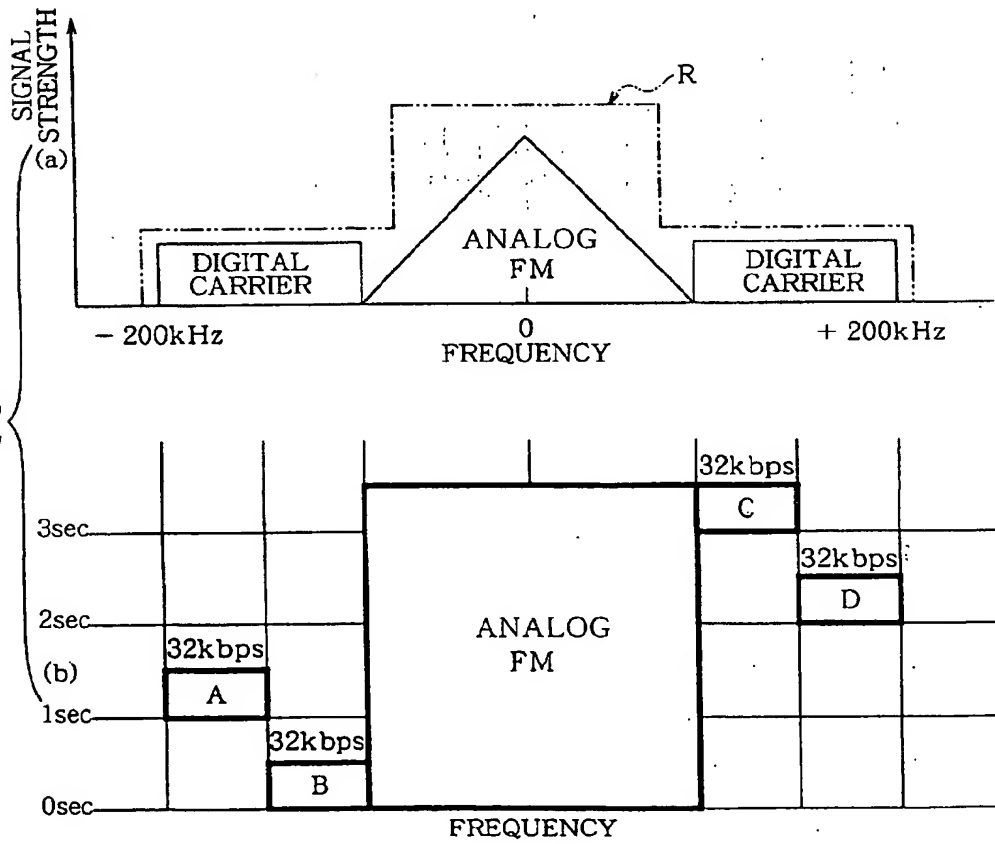


FIG.3

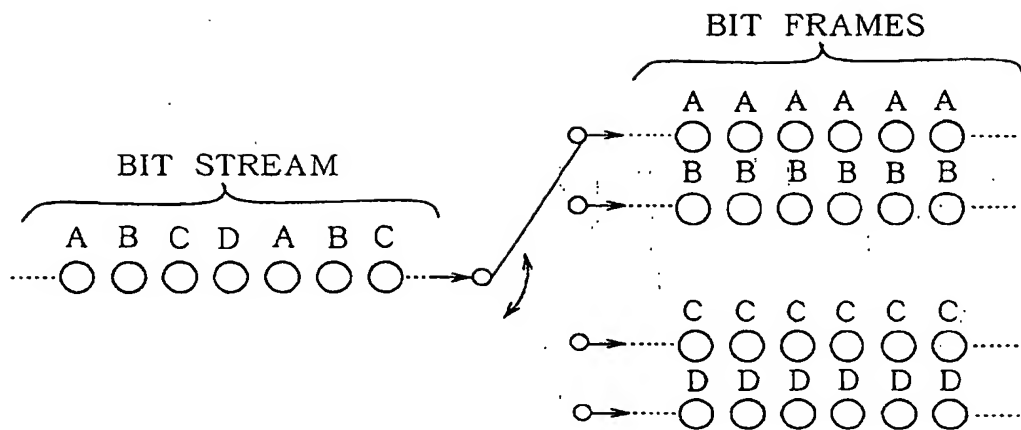


FIG.4

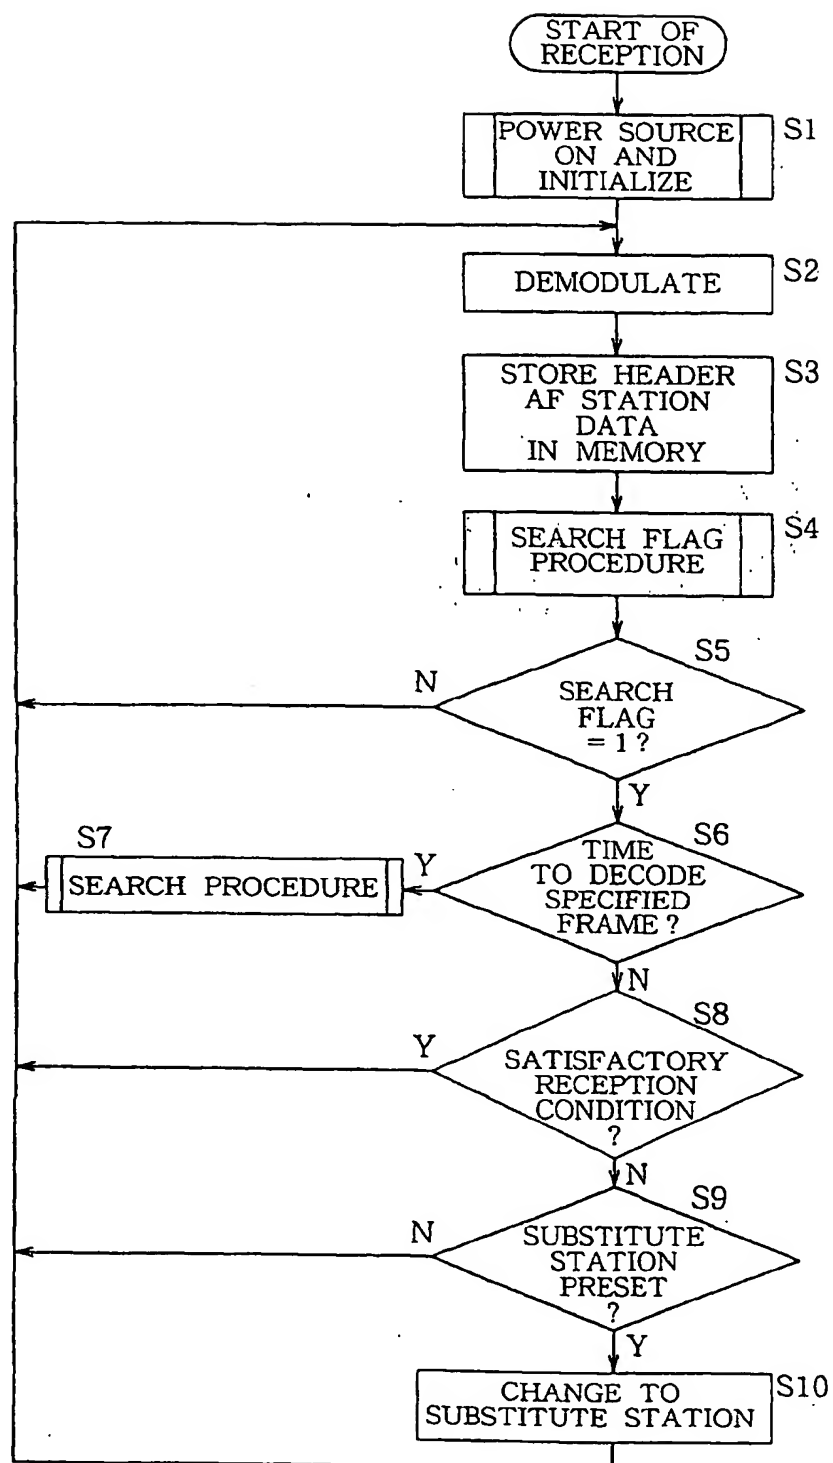




FIG.5

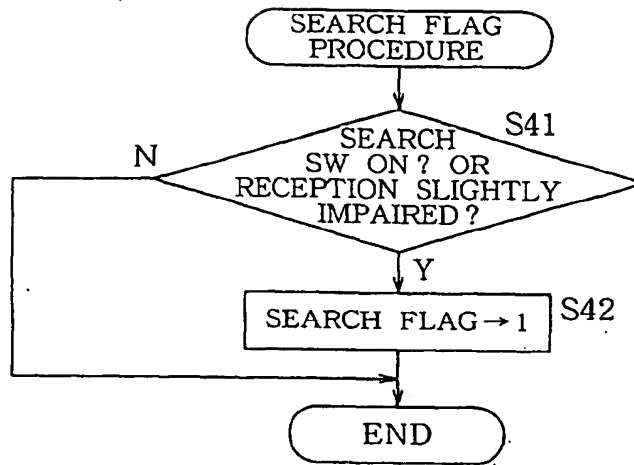


FIG.6



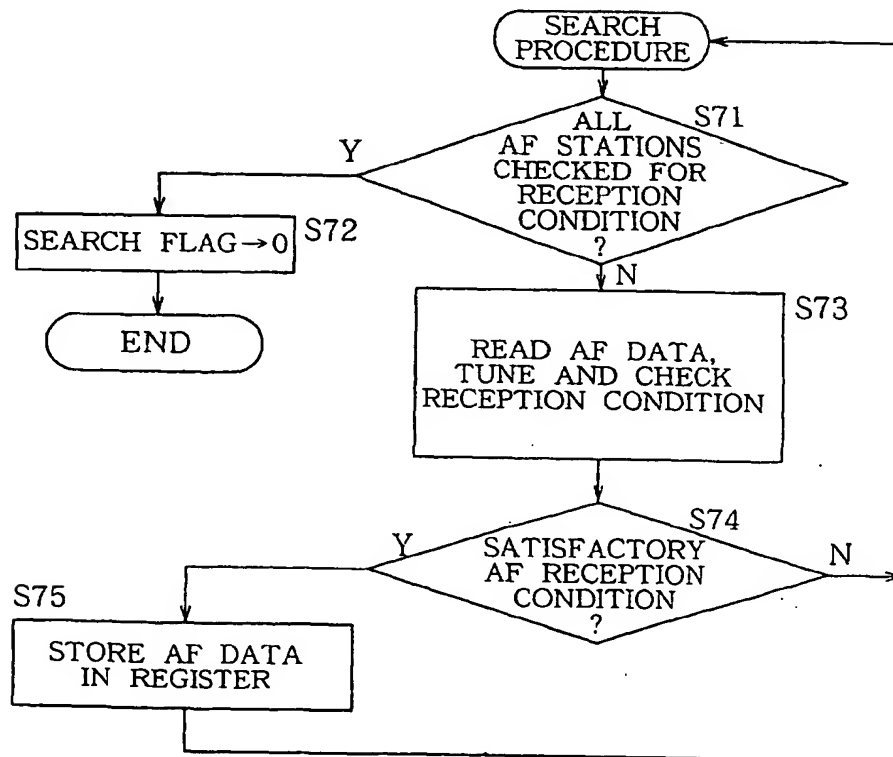


FIG.7

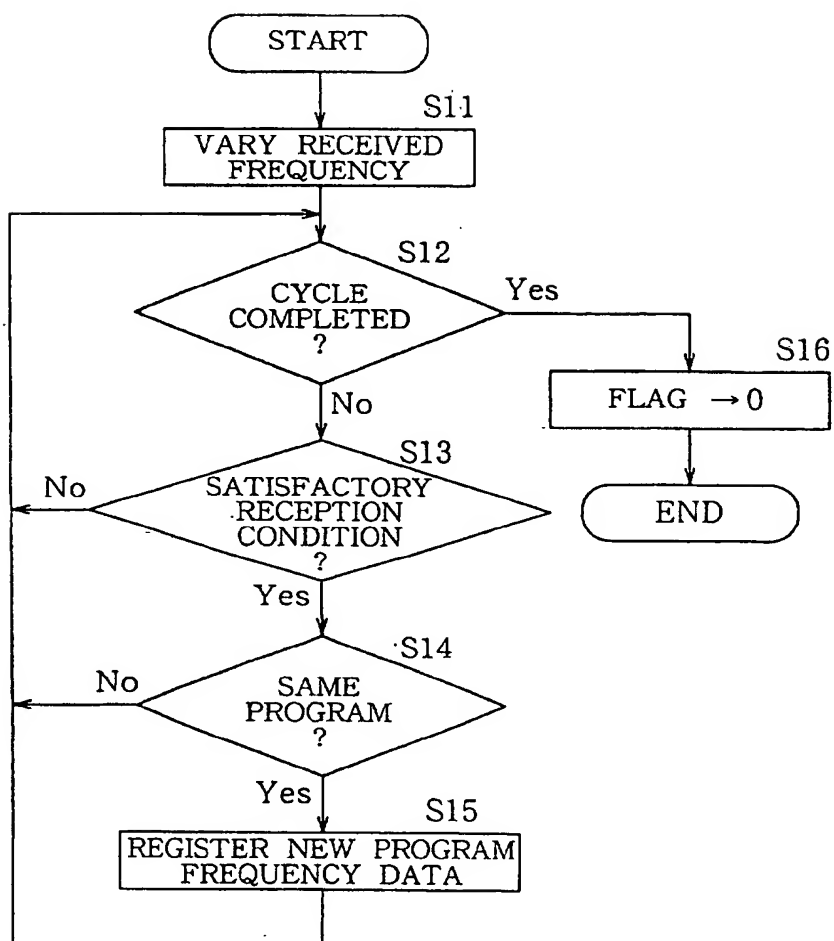



(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 211 829 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
14.12.2005 Bulletin 2005/50

(51) Int Cl.7: **H04H 1/00**

(43) Date of publication A2:  
05.06.2002 Bulletin 2002/23

(21) Application number: **01128770.3**

(22) Date of filing: **03.12.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Inoue, Akio  
Kitakatsuragi-gun, Nara (JP)
- Otsubo, Yoshikazu  
Hirakata-shi, Osaka (JP)
- Hamabata, Takayuki  
Ikoma-gun, Nara (JP)

(30) Priority: **04.12.2000 JP 2000369197**

(71) Applicant: **SANYO ELECTRIC CO., LTD.**  
Moriguchi-shi, Osaka (JP)


(74) Representative: **Glawe, Delfs, Moll**  
Patentanwälte  
Postfach 26 01 62  
80058 München (DE)

(72) Inventors:  
• Hitomi, Akihiko  
Osaka-shi, Osaka (JP)

(54) **Receiver for receiving digital broadcasts, comprising a tuner for selecting a broadcast station from a plurality of broadcast stations**

(57) The invention provides a digital broadcast receiver which comprises a tuner 1 for selecting the desired broadcasting station from among a plurality of broadcasting stations, a demodulator circuit 3 for decoding a plurality of bit frames constituting the digital broadcast of the selected station, and a control circuit 4 for controlling the operation of the tuner and the demodu-

lator circuit. With one broadcasting station selected, the control circuit 4 stops decoding at least one of the bit frames, and searches for other broadcasting station or stations of satisfactory reception condition utilizing free time resulting from stopping decoding. Upon the reception condition becoming impaired, the station being received is changed over to the station of satisfactory reception condition by the control circuit 4.

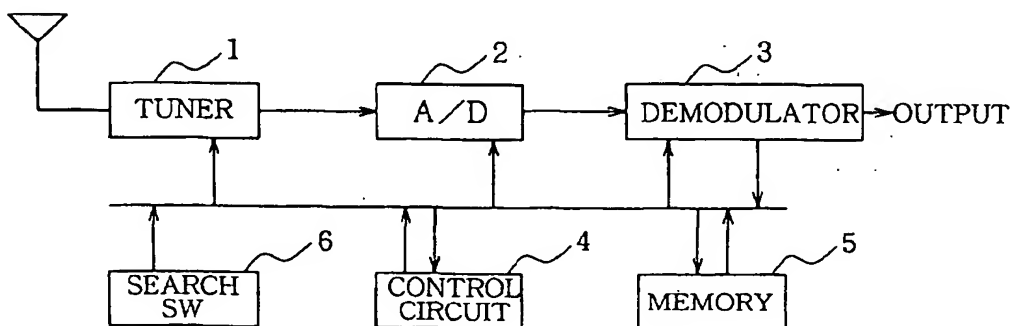**FIG.1****EP 1 211 829 A3**



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 8770

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 1 041 756 A (LUCENT TECHNOLOGIES INC) 4 October 2000 (2000-10-04) * paragraph [0023] * * paragraph [0043] * * paragraph [0048] * * paragraph [0050] * * paragraph [0052] *	1-6	H04H1/00
Y	WO 00/57564 A (TERACOM AB; LINDBERG, ANDERS) 28 September 2000 (2000-09-28) * page 3, line 4 - page 5, line 18 * * page 16, lines 9-13 * * page 17, lines 6-16 * * page 17, line 30 - page 18, line 6 * * page 18, line 30 - page 19, line 1 * * page 22, lines 27,28 *	1-6	
A	WO 99/14874 A (TERACOM AB; REBHAN, RICHARD; KARLSSON, PIERRE; RUOTTINEN, PER; OSSFELD) 25 March 1999 (1999-03-25) * page 2, line 6 - page 3, line 9 * * page 4, line 6 - page 5, line 7 * * page 7, line 9 - page 9, line 25 *	1-6	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	EP 1 050 984 A (SONY INTERNATIONAL GMBH) 8 November 2000 (2000-11-08) * paragraph [0011] *	1-6	H04H
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 24 October 2005	Examiner Torcal Serrano, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

1  
EPO FORM 1503 (3.92) (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 8770

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-10-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1041756	A	04-10-2000	CA 2302608 A1	29-09-2000
			JP 2000341247 A	08-12-2000
WO 0057564	A	28-09-2000	AU 4156200 A	09-10-2000
			EP 1166452 A1	02-01-2002
			SE 514049 C2	18-12-2000
			SE 9901070 A	25-09-2000
			US 2002080895 A1	27-06-2002
WO 9914874	A	25-03-1999	AU 9101998 A	05-04-1999
			CA 2303938 A1	25-03-1999
			EP 1032994 A1	06-09-2000
EP 1050984	A	08-11-2000	NONE	

EPOFORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82